



Product Features

- Selectable constant current and constant voltage output. (Custom on request)
- Full-isolated, delivering up to 60W of power.
- Short circuit, over current and over voltage protection. Up to 80% efficient.
- Fireproof environmental protection PC plastic cover
- 2 years quality warranty



Technical Specifications

Model No.	DR-CC-60			
Input Voltage Range	100-240V/AC			
AC Frequency	48-62Hz			
Input current	0.78Amax			
Output Mode	Constant Current			
Output Current	900mA	1200mA	1500mA	1800mA
On Load Voltage	33-65V	25-50V	19-38V	15-30V
No Load Voltage	78V	60V	46V	36V
Output Power	60W Max.			
Power Factor	>0.95			
Efficiency	>80%			
Dimensions	123*79*35(mm)			
Weight	296g			

Environmental Specifications

Operating Temperature	-30~45°C
Storage Temperature	-40~+70°C
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	In/Out 3000VAC
Vibration	5-55Hz/2g,30 Mimutes
Life Time	50000Hours,at TC max

Conformity & Standards

EMI	EN55022 EN55015 Class B
Safety	EN61347-1 EN61347-2-13
Electromagnetic Immunity	EN61547,ENV5024 EN61000-4-2/3/4/6/8/11
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3



Product Features

- Selectable constant current and constant voltage output. (Custom on request)
- Full-isolated, delivering up to 60W of power.
- Short circuit, over current and over voltage protection. Up to 80% efficient.
- Fireproof environmental protection PC plastic cover
- 2 years quality warranty



Technical Specifications

Model No.	DR-CV-60			
Input Voltage Range	100-240V/AC			
AC Frequency	48-62Hz			
Input current	0.78Amax			
Output Mode	Constant Current			
Output Current	4000mA	2500mA	1700mA	1200mA
On Load Voltage	12V	24V	36V	48V
No Load Voltage	12V	24V	36V	48V
Output Power	60W Max.			
Power Factor	>0.95			
Efficiency	>80%			
Dimensions	123*79*35(mm)			
Weight	296g			


Environmental Specifications

Operating Temperature	-30~45°C
Storage Temperature	-40~+70°C
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	In/Out 3000VAC
Vibration	5-55Hz/2g,30 Mimutes
Life Time	50000Hours,at TC max

Conformity & Standards

EMI	EN55022 EN55015 Class B
Safety	EN61347-1 EN61347-2-13
Electromagnetic Immunity	EN61547,ENV5024 EN61000-4-2/3/4/6/8/11
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3

Installation Introduction

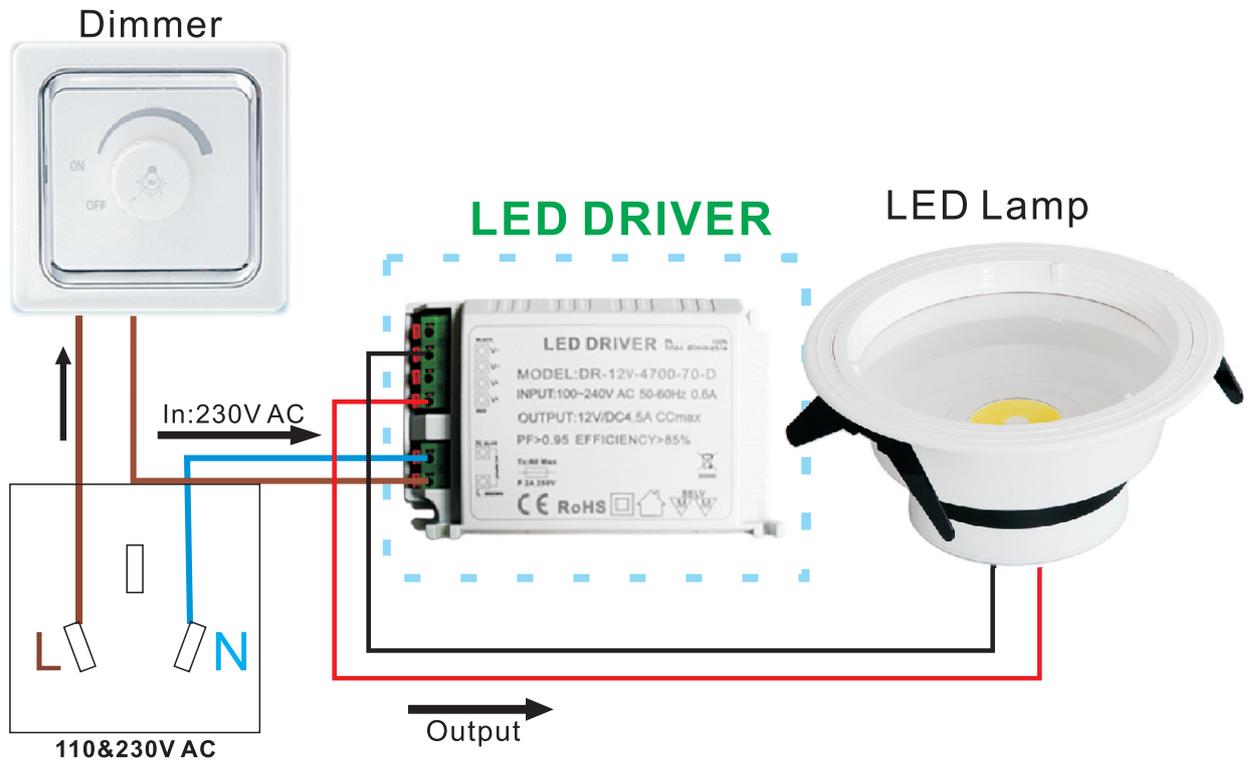

Dimensions Chart

